HITACHI

Reliable solutions

ZAXIS200





HYDRAULIC EXCAVATOR

Model Code : ZX200-5A / ZX200LC-5A / ZX210H-5A / ZX210LCH-5A ZX210K-5A / ZX210LCK-5A

Engine Rated Power : 113 kW (152 HP)

Operating Weight : ZX200-5A : 19 700 kg ZX210H-5A : 20 900 kg ZX210LCH-5A : 21 400 kg

ZX210K-5A : 21 000 kg ZX210LCK-5A : 21 500 kg

Backhoe Bucket : ISO Heaped : 0.51 - 1.20 m³

ZAXIS Empower your Vision

New ZAXIS provides reliable solutions: impressive fuel economy, swift front movements, and easy operation. You'll also find Hitachi technological prowess and expertise, such as the optimized hydraulic system and engine.

New ZAXIS features the key benefits of high quality, low fuel consumption, and high durability, all of which serve to ensure low running costs. New ZAXIS, which is empowered by comprehensive evolution, will realize customers' visions and dreams, and pioneer your colorful future.

Key Benefits for Low Running Costs



More Production with Less Fuel Page 4-5

- \cdot Achieving low fuel consumption and a large workload
- · Powerful operation
- · Easy-to-use attachments



No Compromise on Operator Comfort

HITACHI

- · Comfortable operating environment
- · Comfort-designed operator seat
- · Robust cab
- · New, easy-to-use multifunction monitor



Hitachi Support Chain Page 12-13

· Remote fleet management with Global e-Service · Parts and service



High Quality and Durability Page 6-7

• New more reliable and durable engine

- · Durable design
- · Improved engine start-up performance in cold weather



· Dust-proof indoor net · Grouped remote inspection points · Bottom cover for fuel tank cleaning · Low life cycle costs




· Heavy-duty version: H-series

· Demolition version : K-series







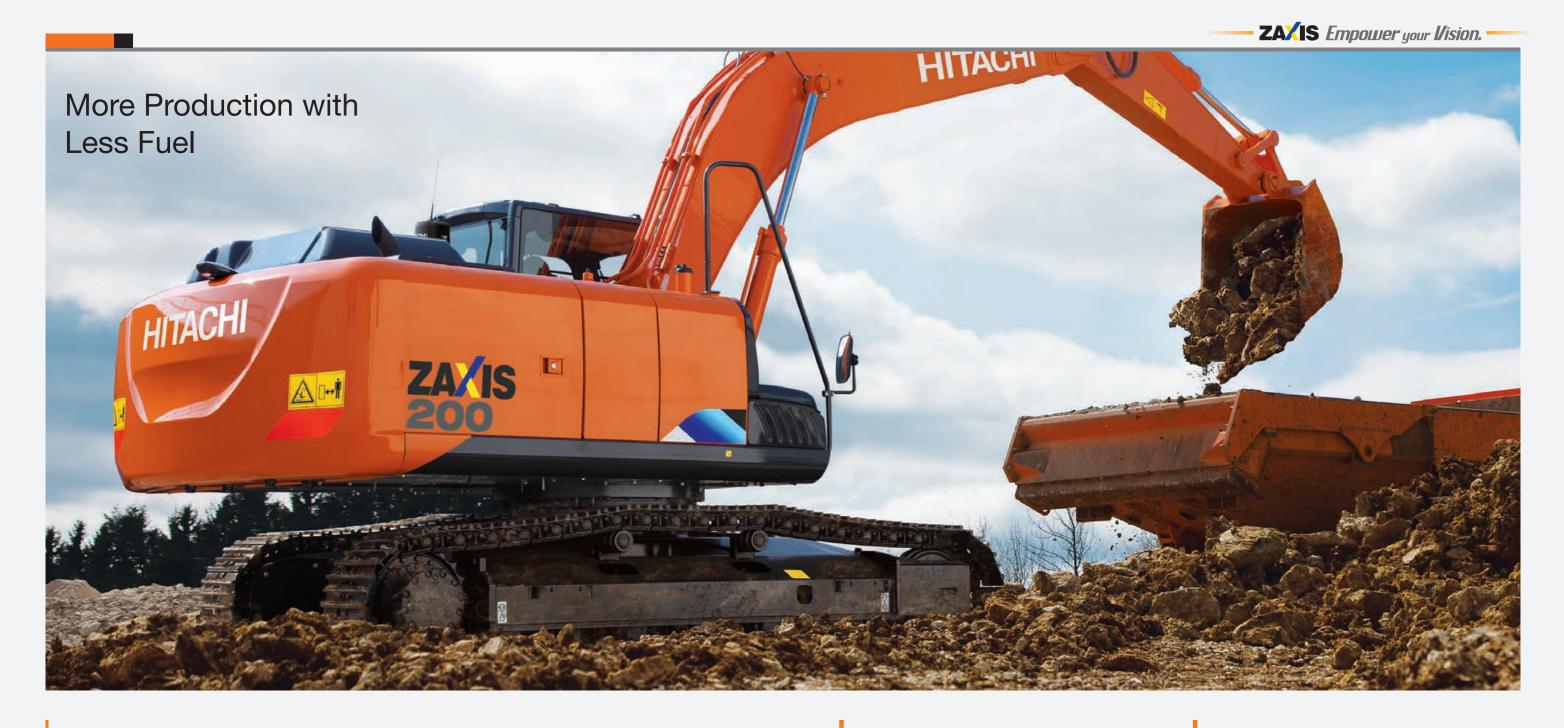

Achieving Low Fuel Consumption and a Large Workload

The HIOS III hydraulic system, which is an operator-friendly HIOS hydraulic system combined with efficient hydraulic control, was selected. It includes an hydraulic boosting system and a enhanced boom recirculation system to increase operating speed and reduce fuel consumption.

14% Reduction in Fuel Consumption

New ZAXIS is a fuel-thrifty excavator that can reduce fuel consumption by 14%, compared to the conventional ZX200-3.

More Fuel Reduction in the ECO Mode

The ECO mode, a new economical mode, can further cut fuel consumption by 10% compared to the PWR mode.

Rapid Arm Roll-in

Arm roll-in speed increases by combined flow from arm and boom cylinders through regenerative valves for productive excavation.

Fast Arm Speed During Boom Lowering

Arm speed increases by boom weight during boom lowering, without needing pressure oil from a pump. That is, arm circuit flow is increased for higher arm speed, allowing for quick loading of a dump truck and positioning of the front.

Powerful Operation

The Power Boost mode allows the operator to surge 10% more digging force for powerful excavation by pressing its button on the control lever. It can obtain the big digging force when the power is needed.

Easy-to-Use Attachments

The operator can change over valves, adjust extra circuit flow, and check settings from the multifunctional monitor next to the operator seat. What's more, 11 types, including flow rate setting, can easily be selected by their identified names.





New More Reliable and Durable Engine

The new engine, which is designed for use in harsh operating environment, is highly durable thanks to a fundamental review of the fuel and cooling systems. It also includes a new auto-idle stop mechanism to reduce fuel consumption and CO₂ emissions.



Durable Design

Large size efficiency cooling system keeps engine cool, helps machine hard works. In addition, the expansion tank is adopted in the cooling system. So, the air in the coolant circuit can always be discharged and display the cooling performance of the machine fully.



The upperstructure frame is reinforced with the D-section skirt to increase Cross-sect rigidity against damage by obstacles.

The X-beam frame is made monolithically with fewer welds for higher rigidity and durability.





Front idlers and adjuster cylinders are integrated to increase durability. Idler brackets and travel motor brackets are both thickened for added durability.



The boom top and foot are reinforced with thickened hightensile steel brackets, which incorporate steel bushings to enhance durability.

The arm-bucket joint is protected by WC thermal spraying on its contact surfaces to reduce wear and jolt. The HN bushings, utilized on joint pins, retain grease inside for longer greasing intervals.


Improved Engine Start-up Performance in Cold Weather

When the ambient temperature is low, waxing light oil components will clog the fuel pre-filter. The recirculation filter prevents this by recirculating hot fuel from the engine.



No Compromise on Operator Comfort





You'll feel comfortable and confident, with plenty of leg space and excellent visibility when operating in the cab. The new compact console gives more leg space. The new door pillar is shifted rearward by 70 mm to widen an entry space for easy access. A new LED room light, interlocked with the door, turns on when the door opens. The front window is easily removed and stored overhead using slide rails. The overhead window is openable for ventilation. Ample air conditioner vents are located strategically for uniform air circulation inside the cab. The control panel and control levers are arranged within easy reach of the operator. AM/FM radio and AUX port (optional) for a mobile music player are available for a long work day with less fatigue. All these designs focus on operator comfort.

Comfort-Designed Operator Seat

The luxury cloth seat is fitted with a headrest and arm rests for operator comfort. The seat can be adjusted in multiple ways, sliding and reclining, to suit operator's size and preferences. The seat can slide rearward by 40 mm more for added leg space. An air suspension seat with a heat pad is optional.

Robust Cab

The robust cab, meeting the OPG (Top Guard Level 1), protects the operator from falling objects. The Roll-over Protective structure (ROPS) is designed to unlikely event of machine tipping or rolling over (Optional). The pilot control shut-off lever is provided with a neutral engine start system that permits engine starting only when the pilot control shut-off lever is in Lock position.





New, Easy-to-Use Multifunction Monitor

The new multi-language, multifunction monitoring system comprises a 7-inch high-resolution color monitor and a multifunction controller. The monitor allows the operator to check varying operating variables: hydraulic oil temperature, fuel level, work mode, full-auto air conditioner, AM/FM radio, rear view monitor camera, maintenance support, and attachment flow adjustment. Menu items can be selected and adjusted by a multifunction controller on the control panel. A new rear view monitor camera always displays the view behind the machine.









Dust-Proof Indoor Net

A dust-proof indoor net, provided at the front of radiator, can be easily removed and cleaned with compressed air. At the rear of the radiator, air blowing can be done through a one-touch open cover. The air condenser is openable for easy cleaning at its rear.



Grouped Remote Inspection Points

Service points are concentrated inside left and right covers that are readily accessible from ground level for convenient servicing and inspection, including water draining from the fuel tank, and replacement of filters.

Bottom Cover for Fuel Tank Cleaning

The fuel tank is equipped with a bottom cover, allowing for easy cleaning of the inside of the tank.

Low Life Cycle Costs

Service intervals are long enough to slash maintenance costs.





Engine Oil Filter : 500 h Hydraulic Oil Filter : 1 000 h Fuel Filter : 1 000 h Fuel Pre-Filter : 1 000 h


Hitachi Support Chain

Hitachi Support Chain is a full customer support system offered after buying a Hitachi machine.

Remote Fleet Management with Global e-Service

Easy Access to On-Site Machines through the Internet

This on-line fleet management system allows you to access each on-site machine from a PC in your office. You can get its operating information and location to increase productivity of the fleet and reduce downtime. Operating data and log are sent to a Hitachi server for processing, and then to customer and dealers around the world. This system is available 24 hours a day, all the year around.

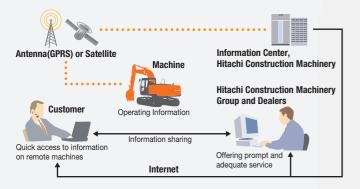

Note: In Some Regions, Global e-Service Is Not Available by Local Regulations.

Main Features of Global e-Service

Functions

Global e-Service provides easy access to a machine on site, conveying operating information and log, including daily operating hours, fuel level, temperatures, pressures, and likes.

Maintenance

Maintenance data and log are displayed on a easy-to-read monitor screen, suggesting recommended maintenance for efficient fleet management.



Parts and Service

Hitachi full customer support is available every area on the globe for full customer satisfaction through Hitachi local dealers.

Parts

Hitachi Global Online Network, a parts supply system, is linked with Japan Parts Center, overseas depots and over 150 dealers abroad to deliver on-line parts information, including in-stock parts, order receptions, shipments and delivery period of over one million parts and components.

Genuine Hitachi Parts

Genuine Hitachi parts, meeting Hitachi stringent quality standards, are guaranteed according to Hitachi warranty standards. The use of genuine Hitachi parts, including engine, fuel, hydraulic oil and filters, may slash running costs, and extend machine life.

Ground Engaging Tools (GETs)

Hitachi provides an array of Hitachi Ground Engaging Tools developed and built for a variety of applications. Using high-

quality, well-maintained GETs will help you get customers' trust. Note: Some dealers do not handle Hitachi GETs.

Remanufactured Components

Hitachi components are remanufactured according to the stringent remanufacturing standards at factories around the world. They have high quality equivalent to new ones, and backed up by Hitachi warranty system.

Service

Extended Warranty – HELP

Hitachi Standard Warranty System is available on all new Hitachi machines. In addition, Hitachi offers Hitachi Extended Life Programs (HELPs) to suit customer expectations – protecting machines under tough operating conditions, avoiding unexpected downtime, and reducing repair costs. Note: Warranty conditions vary by equipment.

Diagnostic Tools — Maintenance Pro

Electronic control system needs quick on-site solutions, apart from mechanical repairs. Hitachi's Maintenance Pro can diagnose machine failures in a short time by plugging a PC into a failed machine.

Technical Training

On-site servicing matters despite locations to keep the machine at peak performance and reduce downtime. Technical Training Center (TTC), located in Japan, educates and trains service technicians and service support personnel coming from Hitachi dealers and factories on the globe according to the international training programs.


ZAXIS Empower your Vision.





Various Versions

Heavy-Duty Version: H-Series ZAXIS 210H

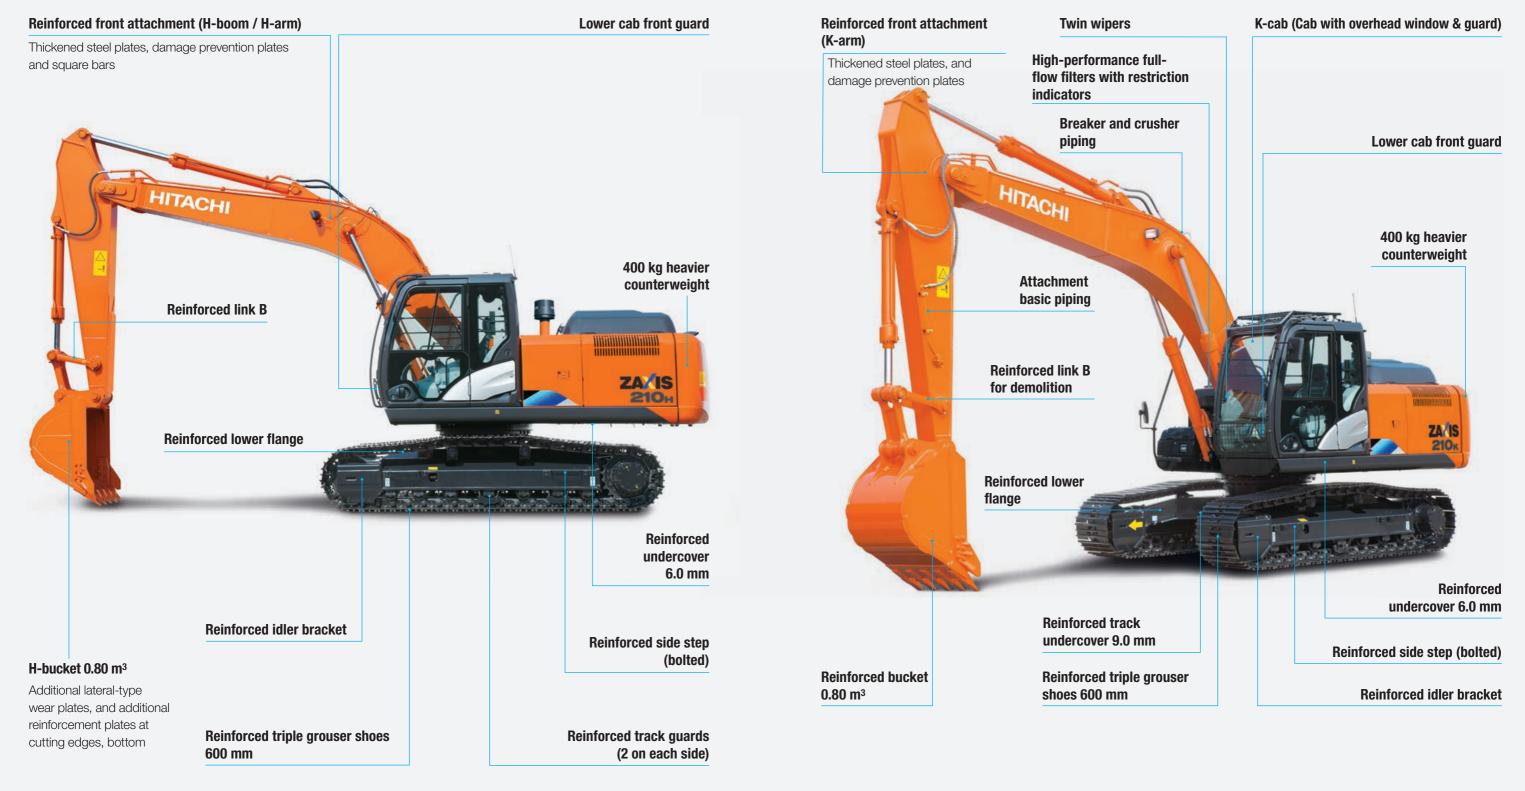

Demolition Version: K-Series

ZAXIS 210k



SPECIFICATIONS

ENGINE	
Model	Isuzu GH-4HK1X
Туре	4-cycle water-cooled, direct injection
Aspiration	Turbocharged, intercooled
No. of cylinders	4
Rated power	
ISO 9249, net	113 kW (152 HP) at 2 000 min-1 (rpm)
SAE J1349, net	113 kW (152 HP) at 2 000 min ⁻¹ (rpm)
Maximum torque	638 Nm (65 kgfm) at 1 500 min ⁻¹ (rpm)
Piston displacement	5.193 L
Bore and stroke	115 mm x 125 mm
Batteries	2 x 12 V / 88 Ah

HYDRAULIC SYSTEM

Hydraulic Pumps

Main pumps	2 variable displacement axial piston pumps
Maximum oil flow	2 x 212 L/min
Pilot pump	1 gear pump
Maximum oil flow	30.2 L/min

Hydraulic Motors

Travel	2 variable displacement axial piston motors
Swing	1 axial piston motor

Relief Valve Settings

Implement circuit	34.3 MPa (350 kgf/cm ²)
Swing circuit	32.3 MPa (330 kgf/cm ²)
Travel circuit	34.3 MPa (350 kgf/cm ²)
Pilot circuit	3.9 MPa (40 kgf/cm ²)
Power boost	38.0 MPa (387 kgf/cm ²)

Hydraulic Cylinders

	Quantity	Bore	Rod diameter
Boom	2	120 mm	85 mm
Arm	1	135 mm	95 mm
Bucket	1	115 mm	80 mm

UPPERSTRUCTURE

Revolving Frame

D-section frame skirt for resistance to deformation.

Swing Device

Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row. Swing parking brake is spring-set/hydraulic-released disc type.

Swing speed 13.5 min⁻¹ (rpm)

Operator's Cab

Independent spacious cab, 1 005 mm wide by 1 675 mm high, conforming to ISO* 10262 OPG Top Guard Level 1. * International Organization for Standardization

UNDERCARRIAGE

Tracks

Heat-treated connecting pins with dirt seals. Hydraulic (grease) track adjusters with shock-absorbing recoil springs.

Numbers of Rollers and Shoes on Each Side

Upper rollers	2
Lower rollers	7 : ZX200-5a/ZX210H-5a/ZX210K-5a
	8 : ZX200LC-5A/ZX210LCH-5A/ZX210LCK-5A
Track shoes	46 : ZX200-5A/ZX210H-5A/ZX210K-5A
	49 : ZX200LC-5A/ZX210LCH-5A/ZX210LCK-5A
Track guard	1 : ZX200-5A/ZX210K-5A
	2 : ZX210H-5A/ZX210LCK-5A/ZX200LC-5A
	3 : ZX210LCH-5A

Travel Device

Each track driven by 2-speed axial piston motor.				
Parking brake is spring-s	et/hydraulic-released disc type.			
Automatic transmission s	system: High-Low.			
Travel speeds	High : 0 to 5.5 km/h			
	Low : 0 to 3.5 km/h			

Maximum traction force .. 203 kN (20 700 kgf)

Gradeability 70% (35 degree) continuous

SERVICE REFILL CAPACITIES

Fuel tank	400.0 L
Engine coolant	31.0 L
Engine oil	
Swing device	
Travel device (each side)	6.8 L
Hydraulic system	
Hydraulic oil tank	135.0 L

WEIGHTS AND GROUND PRESSURE

Operating weight and Ground pressure

			7	ZX200-5A*1	ZX200LC-5A*1		
Shoe type	Shoe width	Arm length	kg kPa(kgf/cm²)		kg	kPa(kgf/cm ²)	
	000	2.42 m	19 600	44 (0.45)	20 200	42 (0.43)	
	600 mm	2.91 m	19 700	44 (0.45)	20 200	42 (0.43)	
Triple grous-	700	2.42 m	20 000	38 (0.39)	20 600	36 (0.37)	
er	700 mm	2.91 m	20 000	38 (0.39)	20 600	36 (0.37)	
800 mm	200 mm	2.42 m	20 200	34 (0.35)	20 900	32 (0.33)	
	800 mm	2.91 m	20 300	34 (0.35)	20 900	32 (0.33)	
Trionglar	760 mm	2.42 m	20 600	36 (0.37)	21 300	34 (0.35)	
Trianglar 760 mm	760 mm	2.91 m	20 700	36 (0.37)	21 300	34 (0.35)	
Flat	600 mm	2.42 m	20 400	45 (0.46)	21 200	44 (0.45)	
Fiat	000 11111	2.91 m	20 500	46 (0.47)	21 100	44 (0.45)	
	000	2.42 m	19 900	44 (0.45)	21 100	43 (0.44)	
Pad crawler 600 mm		2.91 m	20 000	44 (0.45)	21 000	43 (0.44)	

			ZX210H-5A*2		ZX210LCH-5A ^{*2}		ZX210K-5A*3		ZX210LCK-5A*3	
Shoe type	Shoe width	Arm length	kg	kPa(kgf/cm ²)	kg	kPa(kgf/cm ²)	kg	kPa(kgf/cm ²)	kg	kPa(kgf/cm ²)
Reinforced Triple grouser	600 mm	2.91 m	20 900	47 (0.48)	21 400	44 (0.45)	21 000	47 (0.48)	21 500	44 (0.45)

*1 :Including 0.80 m³ (ISO heaped) bucket weight (660 kg) and counterweight (3 850kg). *2 :Including 0.80 m³ (ISO heaped) H-bucket weight (760 kg) and counterweight (4 250 kg).

*3 :Including 0.80 m³ (ISO heaped) reinforced bucket weight (750 kg) and counterweight (4 250 kg).

SPECIFICATIONS

WEIGHT: BASIC MACHINE and COMPONENTS

Basic Machine Weight and Overall width



Excluding front-end attachment, fuel, hydraulic oil, coolant, etc., and including counterweight.

ZX200-5A

Shoe width	Weight	Overall width			
600 mm	15 200 kg	2 860 mm			
700 mm	15 600 kg	2 910 mm			
800 mm	15 900 kg	3 000 mm			

ZX210H-5A								
Shoe width Weight		Overall width						
600 mm	16 200 kg	2 860 mm						

ZX210K-5A		
Shoe width Weight		Overall width
600 mm	16 300 kg	2 860 mm

ZX200LC-5A		
Shoe width	Weight	Overall width
600 mm	15 800 kg	2 990 mm
700 mm	16 200 kg	3 090 mm
800 mm	16 500 kg	3 190 mm

ZX210LCH-5A

Shoe width	Shoe width Weight				
600 mm	16 700 kg	2 990 mm			

ZX210LCK-5A		
Shoe width	Weight	Overall width
600 mm	16 800 kg	2 990 mm

Component weights

	ZX200-5A / ZX200LC-5A	ZX210H-5A / ZX210LCH-5A	ZX210K-5A / ZX210LCK-5A
Counterweight	3 850 kg	4 250 kg	4 250 kg
Boom (with boom and arm cylinder)	2 100 kg	2 130 kg	2 150 kg
2.42 m arm (with bucket cylinder)	940 kg	—	_
2.91 m arm (with bucket cylinder)	1 000 kg	1 110 kg	1 140 kg
0.80 m ³ bucket	660 kg	760 kg	750 kg

BUCKET AND ARM DIGGING FORCES

Arm length	2.42 m	2.91 m
Bucket digging force* ISO	158 kN (16 200 kgf)	158 kN (16 200 kgf)
Bucket digging force* SAE	141 kN (14 400 kgf)	141 kN (14 400 kgf)
Arm crowd force* ISO	140 kN (14 200 kgf)	114 kN (11 600 kgf)
Arm crowd force* SAE	133 kN (13 600 kgf)	110 kN (11 200 kgf)

* At power boost

BACKHOE ATTACHMENTS

Boom and arms are of welded, box-section design. 5.68 m boom, and 2.42 m and 2.91 m arms are available. Bucket is of welded steel structure. Side clearance adjust mechanism provided on the bucket joint bracket.

Buckets

							Recomm	endation				
Capacity	Width No. Of teeth Weight		ZX20	ZX200-5A ZX200LC-5A				ZX210H-5A ZX210LCH-5A		ZX210K-5A ZX210LCK-5A		
ISO heaped	Without side cutters	With side cutters	1		Arm 2.42 m	Arm 2.91 m	Arm 2.42 m	Arm 2.91 m		arm 1 m		arm 1 m
0.51 m ³	720 mm	830 mm	3	530 kg	O	0	0	O	0	0	0	O
0.80 m ³	1 030 mm	1 140 mm	5	660 kg	O	0	0	0	0	0	0	O
0.91 m ³	1 150 mm	1 260 mm	5	700 kg	O	0	0	0	0	0	0	O
1.10 m ³	1 330 mm	1 440 mm	6	770 kg		_		0	-	0	-	0
1.20 m ³	1 450 mm	_	6	690 kg		_		_	-	_	-	_
*1 0.80 m ³	1 030 mm	1 140 mm	5	750 kg	O	O	O	0	O	O	O	O
^{*1} 0.91 m ³	1 150 mm	1 260 mm	5	800 kg	O	0	0	0	0	0	0	O
*2 0.80 m ³	1 040 mm	1 150 mm	5	760 kg	O	O	O	O	O	O	O	O
*3 0.80 m ³	1 030 mm	1 140 mm	5	660 kg	O	0	0	0	0	0	0	O
*4 0.80 m ³	1 040 mm	1 150 mm	5	760 kg	O	O	O	O	O	O	O	O
*5 0.60 m ³	800 mm	_	3	950 kg	•	_	•	_	-	_	-	_
One-point ripper			1	540 kg	•	_		_	-	_	-	-
Slope-finishing blade: Width	1 100 mm, leng	th 1 800 mm	-	590 kg	\diamond	\diamond	\diamond	\diamond	\diamond	\diamond	-	_
V shape Bucket:			3	520 kg	0	0	0	0	0	0	-	_

*2 H-bucket *3 Level-pin-type bucket


*4 Super V teeth type bucket *5 Ripper bucket

O Suitable for materials with density of 1 600 kg/m³ or less □ Suitable for materials with density of 1 100 kg/m³ or less

Heavy-duty service


SPECIFICATIONS

WORKING RANGES

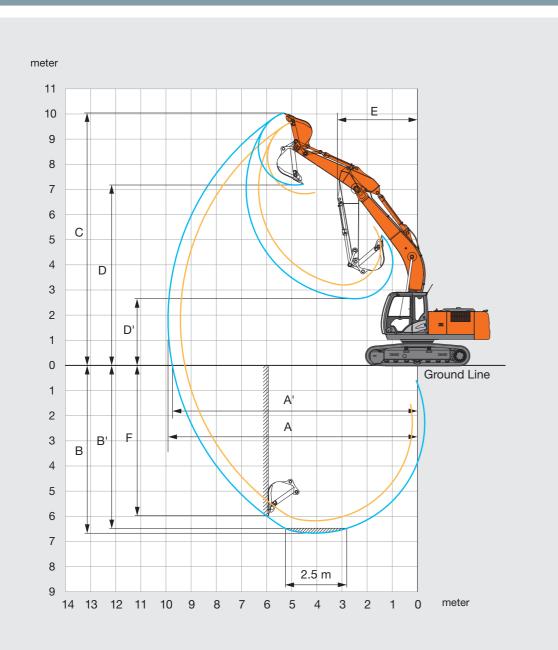

		Unit: mm
Arm length	2.42 m	2.91 m
A Max. digging reach	9 430	9 920
A' Max. digging reach (on ground)	9 250	9 750
B Max. digging depth	6 180	6 670
B' Max. digging depth for 2.5 m level	5 950	6 490
C Max. cutting height	9 670	10 040
D Max. dumping height	6 830	7 180
D' Min. dumping height	3 200	2 650
E Min. swing radius	3 280	3 180
F Max. vertical wall digging depth	5 300	5 990

DIMENSIONS

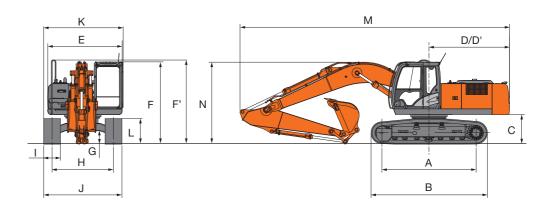

	ZX200-5A	ZX200LC-5A	ZX210H-5A	ZX210LCH-5A	ZX210K-5A	ZX210LCK-5A
A Distance between tumblers	3 370	3 660	3 370	3 660	3 370	3 660
B Undercarriage length	4 170	4 470	4 170	4 470	4 170	4 470
C Counterweight clearance	1 030	1 030	1 030	1 030	1 030	1 030
D Rear-end swing radius	2 890	2 890	2 890	2 890	2 890	2 890
D' Rear-end length	2 890	2 890	2 890	2 890	2 890	2 890
E Overall width of upperstructure	2 710	2 710	2 710	2 710	2 710	2 710
F Overall height of cab	2 950	2 950	2 950	2 950	3 080	3 080
F' Overall height of upperstructure	3 010	3 010	3 010	3 010	3 080	3 080
G Min. ground clearance	450	450	450	450	450	450
H Track gauge	2 200	2 390	2 200	2 390	2 200	2 390
I Track shoe width	G 600	G 600	G 600	G 600	G 600	G 600
J Undercarriage width	2 800	2 990	2 800	2 990	2 800	2 990
K Overall width	2 860	2 990	2 860	2 990	2 860	2 990
L Track height with triple grouser shoes	920	920	920	920	920	920
M Overall length						
With 2.42 m arm	9 750	9 750	-	-	-	-
With 2.91 m arm	9 660	9 660	9 660	9 660	9 660	9 660
N Overall height of boom						
With 2.42 m arm	3 180	3 180	-	-	_	-
With 2.91 m arm	2 940	2 940	2 940	2 940	2 940	2 940

G: Triple grouser shoes

Unit: mm

LIFTING CAPACITIES (Without Bucket)

ZX200-5A									🖁 Rating o	ver-front (🕞 Rating o	ver-side or 3	60 degrees	Unit : kg
	Load		Load radius m											
Conditions	point	1	.5	3	.0	4	.5	6	.0	7	.5		t max. reach	1
Contaitione	height m	Ů	O	Ů	O	ů	O	ů	O	ů	O	ů	O	meter
Boom 5.68 m	6.0							*5 750	4 530			5 570	3 730	6.74
Arm 2.42 m	4.5					*7 340	6 780	*6 230	4 380			4 640	3 090	7.48
Counterweight	3.0					*9 210	6 250	6 370	4 160	4 540	3 000	4 210	2 780	7.87
3 850 kg	1.5					9 500	5 820	6 140	3 950	4 430	2 900	4 070	2 670	7.95
Shoe 600 mm	0 (Ground)					9 280	5 630	5 990	3 820	4 370	2 840	4 180	2 730	7.74
	-1.5			*9 910	*9 910	9 260	5 610	5 950	3 780			4 610	2 990	7.21
	-3.0			*13 220	10 890	9 380	5 720	6 040	3 860			5 670	3 650	6.28
	-4.5					*6 880	6 010					*6 450	5 640	4.71
	-6.0													
Boom 5.68 m	6.0							*5 230	4 600			*4 040	3 290	7.32
Arm 2.91 m	4.5					*6 610	*6 610	*5 780	4 440	4 670	3 120	*3 990	2 780	8.01
Counterweight	3.0					*8 530	6 390	6 430	4 210	4 560	3 010	3 840	2 530	8.37
3 850 kg Shoe 600 mm	1.5					9 6 1 0	5 910	6 170	3 980	4 440	2 900	3 720	2 430	8.45
	0 (Ground)			*4 850	*4 850	9 300	5 650	5 990	3 810	4 340	2 820	3 800	2 470	8.25
	-1.5	*5 480	*5 480	*9 100	*9 100	9 220	5 570	5 910	3 750	4 320	2 790	4 130	2 680	7.76
	-3.0	*9 970	*9 970	*14 390	10 720	9 290	5 630	5 950	3 780			4 900	3 170	6.90
	-4.5			*11 250	11 080	*8 120	5 840					*6 250	4 430	5.52
	-6.0													

Notes: 1. Ratings are based on ISO 10567.

- 2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
- 3. The load point is the center-line of the bucket pivot mounting pin on the arm.
- 4. *Indicates load limited by hydraulic capacity.

5. 0 m = Ground.

For lifting capacities, subtract bucket and quick hitch weight from lifting capacities without bucket.

ZX210	OLCH-5A	

ZX210LCH-5A									🖁 Rating o	ver-front	🕞 Rating o	ver-side or 3	60 degrees	Unit : kg
	Load					Load ra	adius m					Δ+	max. reach	
Conditions	point	1.	.5	3	.0	4	.5	6	.0	7.	5	A	. max. reach	
Contaillorito	height m	ů	O	ů	O	Ů	O	ů	O	ů	O	ů	O	meter
H-Boom 5.68 m	6.0							*5 140	*5 140			*3 980	3 850	7.32
H-Arm 2.91 m	4.5					*6 520	*6 520	*5 680	5 210	*5 300	3 660	*3 930	3 280	8.01
Counterweight	3.0					*8 410	7 580	*6 540	4 960	5 460	3 550	*4 040	2 990	8.37
4 250 kg	1.5					*10 130	7 070	*7 410	4 720	5 330	3 430	*4 310	2 880	8.45
Shoe 600 mm	0 (Ground)			*4 790	*4 790	*10 980	6 790	7 270	4 540	5 240	3 340	4 570	2 930	8.25
	-1.5	*5 420	*5 420	*9 050	*9 050	*10 950	6 720	7 190	4 470	5 210	3 320	4 980	3 180	7.76
	-3.0	*9 920	*9 920	*14 230	13 210	*10 090	6 780	7 240	4 510			5 930	3 760	6.90
	-4.5			*11 100	*11 100	*8 000	7 010					*6 140	5 270	5.52
	-6.0													

ZX210K-5A

	Load		Load radius m									At max. reach		
Conditions	point	1.	.5	3	.0	4	.5	6	.0	7.	5	Al	max. reach	
	height m	ů	O	ů	O	Ů	O	ů	O	ů	O	ů	O	meter
Boom 5.68 m	6.0							*5 140	4 880			*3 990	3 480	7.32
K-Arm 2.91 m	4.5					*6 520	*6 520	*5 680	4 720	4 940	3 300	*3 930	2 950	8.01
Counterweight	3.0					*8 410	6 800	*6 540	4 470	4 830	3 200	*4 040	2 680	8.37
4 250 kg	1.5					*10 130	6 290	6 550	4 230	4 700	3 080	3 940	2 580	8.45
Shoe 600 mm	0 (Ground)			*4 790	*4 790	9 890	6 020	6 350	4 060	4 600	2 990	4 020	2 620	8.25
	-1.5	*5 430	*5 430	*9 050	*9 050	9 800	5 940	6 270	3 990	4 570	2 960	4 370	2 840	7.76
	-3.0	*9 920	*9 920	*14 210	11 460	9 880	6 010	6 310	4 020			5 200	3 360	6.90
	-4.5			*11 080	*11 080	*7 980	6 220					*6 130	4 710	5.52
	-6.0													

ZX200LC-5A									🖁 Rating o	ver-front (〕 Rating c	over-side or 3	60 degrees	Unit : kg
	Load					Load ra	adius m					Δ.	t max. reach	
Conditions	point	1	.5	3	.0	4	.5	6	.0	7	.5		l max. reach	
Contaitionio	height m	ů	O	Ů	O	Ů	O	Ů	O	ů	O	Ů	O	meter
Boom 5.68 m	6.0							*5 750	5 080			*5 780	4 180	6.75
Arm 2.42 m	4.5					*7 340	*7 340	*6 230	4 930			5 310	3 480	7.49
Counterweight	3.0					*9 210	7 100	*7 040	4 710	5 210	3 390	4 830	3 150	7.87
3 850 kg	1.5					*10 720	6 660	7 110	4 490	5 100	3 300	4 680	3 030	7.96
Shoe 600 mm	0 (Ground)					10 970	6 470	6 950	4 350	5 040	3 230	4 820	3 100	7.74
	-1.5			*9 910	*9 910	*10 910	6 450	6 910	4 320			5 320	3 400	7.21
	-3.0			*13 220	12 750	*9 730	6 560	7 000	4 400			6 560	4 150	6.28
	-4.5					*6 880	6 860					*6 450	6 430	4.71
	-6.0													
Boom 5.68 m	6.0							*5 230	5 080			*4 040	3 640	7.32
Arm 2.91 m	4.5					*6 610	*6 610	*5 780	4 920	5 280	3 460	*3 990	3 090	8.01
Counterweight	3.0					*8 530	7 140	*6 650	4 680	5 170	3 350	*4 100	2 820	8.37
3 850 kg	1.5					*10 260	6 650	7 060	4 440	5 040	3 240	4 220	2 720	8.45
Shoe 600 mm	0 (Ground)			*4 850	*4 850	10 860	6 380	6 870	4 280	4 950	3 150	4 320	2 770	8.25
	-1.5	*5 480	*5 480	*9 100	*9 100	10 770	6 310	6 790	4 210	4 920	3 130	4 700	3 000	7.76
	-3.0	*9 970	*9 970	*14 390	12 380	*10 230	6 370	6 830	4 240			5 600	3 550	6.90
	-4.5			*11 250	*11 250	*8 120	6 580					*6 250	4 960	5.52
	-6.0													


ZX210LCK-5A

	Load point height m					Load ra	adius m					At max, reach		
Conditions		1.	.5	3	.0	4	.5	6	.0	7.	5	A	. max. reach	
Contaillonic		Ů	O	ů	O	Ů	O	Ů	O	ů	O	Ů	O	meter
Boom 5.68 m	6.0							*5 140	*5 140			*3 990	3 860	7.32
K-Arm 2.91 m	4.5					*6 520	*6 520	*5 680	5 220	*5 300	3 660	*3 930	3 280	8.01
Counterweight	3.0					*8 410	7 600	*6 540	4 970	5 470	3 560	*4 040	2 990	8.37
4 250 kg	1.5					*10 130	7 070	*7 410	4 720	5 340	3 430	*4 320	2 880	8.45
Shoe 600 mm	0 (Ground)			*4 790	*4 790	*10 970	6 790	7 280	4 550	5 240	3 340	4 570	2 930	8.25
	-1.5	*5 430	*5 430	*9 050	*9 050	*10 940	6 720	7 200	4 470	5 210	3 320	4 980	3 180	7.76
	-3.0	*9 920	*9 920	*14 210	13 210	*10 080	6 780	7 240	4 510			5 930	3 760	6.90
	-4.5			*11 080	*11 080	*7 980	7 010					*6 130	5 270	5.52
	-6.0													

ZX210H-5A

Rating over-front Rating over-side or 360 degrees Unit : kg

	Load					Load ra	adius m					At max. reach		
Conditions	point	1	.5	3	.0	4	.5	6.	.0	7.	.5		I Max. Teach	I
	height m	ů	O	ů	O	Ů	O	ů	O	Ů	O	ů	O	meter
H-Boom 5.68 m	6.0							*5 140	4 870			*3 980	3 480	7.32
H-Arm 2.91 m	4.5					*6 520	*6 520	*5 680	4 710	4 940	3 300	*3 930	2 950	8.01
Counterweight	3.0					*8 410	6 790	*6 540	4 470	4 820	3 190	*4 040	2 680	8.37
4 250 kg	1.5					*10 130	6 290	6 540	4 220	4 690	3 080	3 930	2 580	8.45
Shoe 600 mm	0 (Ground)			*4 790	*4 790	9 880	6 020	6 350	4 060	4 600	2 990	4 020	2 620	8.25
	-1.5	*5 420	*5 420	*9 050	*9 050	9 800	5 950	6 270	3 990	4 570	2 960	4 370	2 840	7.76
	-3.0	*9 920	*9 920	*14 230	11 470	9 870	6 010	6 310	4 020			5 200	3 370	6.90
	-4.5			*11 100	*11 100	*8 000	6 230					*6 140	4 720	5.52
	-6.0													



A: Load radius B: Load point height

C: Lifting capacity

🖁 Rating over-front	Rating over-side or 360 degrees	Unit : kg
---------------------	---------------------------------	-----------

Rating over-front 💭 Rating over-side or 360 degrees Unit : kg

EQUIPMENT

Standard and optional equipment may vary by country, so please consult your Hitachi dealer for details.

O : Optional equipment

Standard equipment

	ZX200-5A/	ZX210H-5A /	ZX210K-5A/
ENGINE	ZX200LC-5A	ZX210LCH-5A	ZX210LCK-5A
ENGINE			
Air cleaner double filters	•	•	•
Alternator 50 A	•	•	•
Auto idle system	•	•	•
Auto shut-down control	•	•	•
Cartridge-type engine oil filter	•	•	•
Cartridge-type fuel main filter	•	•	•
Cartridge-type fuel pre-filter with water separator	•	•	•
Dry-type air filter with evacuator valve (with air filter restriction indicator)	•	•	•
Dust-proof indoor net	•	•	•
ECO/PWR mode control	٠	•	•
Engine oil drain coupler	٠	•	•
Engine warm-up device	٠	•	•
Fan guard	٠	•	•
Fuel cooler	•	•	•
Maintenance free pre-cleaner	0	0	0
Radiator expansion tank	٠	•	•
HYDRAULIC SYSTEM			
Auto power lift	•	•	•
Control valve with main relief valve	•	•	•
Full-flow filter	•	•	-
High mesh full flow filter with restriction indicator	0	0	•
One extra port for control valve	•	•	•
Pilot filter	•	•	•
Power boost	•	•	•
Suction filter	•	•	•
Work mode selector	•	•	•

	ZX200-5A / ZX200LC-5A	ZX210H-5A / ZX210LCH-5A	ZX210K-5A / ZX210LCK-5A
CAB			
All-weather sound suppressed steel cab	٠	•	•
AM-FM radio with 2 speaker	٠	•	•
Ashtray	٠	•	•
Auto control air conditioner	٠	•	•
AUX. terminal and storage	0	0	0
Cab (Center pillar reinforced structure)	٠	•	•
Cigarette lighter 24V	•	•	•
Drink holder	•	•	•
Drink holder with hot & cool	٠	•	•
Electric double horn	٠	•	•
Engine shut-off switch	٠	•	•
Evacuation hammer	٠	•	•
Floor mat	٠	•	•
Footrest	٠	•	•
Front window washer	٠	•	•
Front windows on upper, lower and left side can be opened	٠	•	•
Glove compartment	٠	•	•
Hot & cool box	٠	•	•
Intermittent windshield wipers	٠	•	•
K-cab (with overhead window and guard)	_	_	•
Key cylinder light	•	•	•
LED room light with door courtesy	•	•	•
OPG top guard Level I (ISO10262) compliant cab	٠	•	•
Pilot control shut-off lever	٠	•	•
Rain guard	0	0	0
Rear tray	•	•	•
Retractable seat belt	٠	•	•
ROPS (ISO 12117-2) compliant cab	0	0	0
Rubber radio antenna	٠	•	•
Seat : air suspension seat with heater	0	0	0
Seat : fablic seat	٠	•	•
Seat : mechanical suspension seat	0	0	0
Seat adjustment part : backrest, armrest, height and angle, slide forward / back	•	•	•
Short wrist control levers (Bold type)	0	0	0
Short wrist control levers (Slim type)	٠	•	•
Twin wiper	_	-	•
Lower cab front guard	0	•	•
Upper cab front guard	0	0	0
4 fluid-filled elastic mounts	٠	•	•
12V power source	0	0	0

	ZX200-5A / ZX200LC-5A	ZX210H-5A / ZX210LCH-5A	ZX210K-5A / ZX210LCK-5A
MONITOR SYSTEM			
Alarms: overheat, engine warning, engine oil pressure, alternator, minimum fuel level, hydraulic filter restriction, air filter restriction, work mode, overload, etc	•	•	•
Alarm buzzers: overheat, engine oil pressure, overload	•	•	•
Display of meters: water temperature, hour, fuel rate, clock	•	•	•
Other displays: work mode, auto-idle, glow, rearview monitor, operating conditions, etc	•	•	•
32 languages selection	•	•	•

LIGHTS			
Additional boom light with cover	0	0	0
Additional cab roof front lights	0	0	0
Rear light	0	0	0
2 working lights	•	•	•

UPPER STRUCTURE			
Batteries 2 x 88 Ah	•	•	•
Counterweight 3 850 kg	•	—	_
Counterweight 4 250 kg	0	•	٠
Electric fuel refilling pump	0	0	0
Fuel level float	•	•	٠
Hydraulic oil level gauge	•	•	٠
Lockable fuel refilling cap	•	•	٠
Lockable machine covers	•	•	٠
Rear view camera	•	•	٠
Rear view mirror (right & left side)	•	•	٠
Swing parking brake	•	•	٠
Tool box	•	•	٠
Undercover	٠	—	_
Undercover 6.0 mm reinforced	0	•	٠
Utility space	•	•	•

	ZX200-5A / ZX200LC-5A	ZX210H-5A / ZX210LCH-5A	ZX210K-5A / ZX210LCK-5A
UNDERCARRIAGE		ZAZ TOLOTT SA	ZAZ TOLOR JA
Bolt-on sprocket	•	•	•
Reinforced lower flange	_	•	•
Reinforced idler bracket	_	•	•
Reinforced side step	_	•	•
Reinforced track links with pin	•	•	•
seals Shoe: 600 mm triple grouser	•	Deinforment	Reinforced
Track undercover 9.0 mm	_	Reinforced	Reinforcea
reinforced Travel direction mark on track			•
frame	•	•	•
Travel motor covers	•	•	•
Travel parking brake	•	•	•
Upper and lower rollers	•	•	•
1 track guard (each side)	ZX200-5A	_	ZX210K-5A
2 track guards (each side)	ZX200LC-5A	ZX210H-5A	ZX210LCK-5A
3 track guards (each side)	_	EX210LCH-5A	—
4 tie down brackets	•	٠	•
FRONT ATTACHMENTS			
Arm 2.42 m	0	0	0
Arm 2.91 m	•	H-Arm	K-Arm
Boom 5.68 m	•	•	
		H-Boom	•
Bucket 0.80 m ³ (ISO heaped)	•	H-Bucket	Reinforced Bucket
Centralized lubrication system	•	•	•
Dirt seal on all bucket pins	•	•	•
Flanged pin	•	•	•
HN bushing	•	•	•
Reinforced link B	-	•	for demolition
Reinforced resin thrust plate	•	•	•
WC (tungsten-carbide) thermal spraying	•	•	•
	1		
ATTACHMENTS			
Additional pump	0	0	0
Assist piping	0	0	0
Attachment basic piping	0	0	•
Breaker and crusher piping	0	0	•
Line filter	0	0	0
Parts for breaker and crusher	0	0	•
Pilot accumlator	0	0	•
2 pump combined flow for	0	0	
attachment basic piping	0	0	•
MISCELLANEOUS			
Global e-Service	•	•	•
Onboard information controller	•	•	•
Skid-resistant plates and handrails	•	•	•
Standard tool kit	•	•	•
Swing motion alarm device with	•	•	•
lumps Travel motion alarm device	0	0	0

MEMO	





Hitachi Environmental Vision 2025

The Hitachi Group released the Environmental Vision 2025 to curb annual carbon dioxide emissions. The Group is committed to global production while reducing environmental impact in life cycles of all products, and realizing a sustainable society by tackling three goals — prevention of global warming, conservation of resources, and preservation of ecosystem.

Reducing Environmental Impact by New ZAXIS

Hitachi makes a green way to cut carbon emissions for global warming prevention according to LCA*. New ZAXIS utilizes lots of technological advances, including the new ECO mode, and Isochronous Control. Hitachi has long been committed to recycling of components, such as aluminum parts in radiators and oil cooler. Resin parts are marked for recycling. *Life Cycle Assessment – ISO 14040

Before using a machine with a satellite communication system, please make sure that the satellite communication system complies with local regulations, safety standards and legal requirements. If not so, please make modifications accordingly.

These specifications are subject to change without notice. Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.

Hitachi Construction Machinery Co., Ltd. www.hitachi-c-m.com

KS-EN302